

How to Replace a Hearing Aid Battery



Step 1: Open the battery door.




Step 2: Remove the battery. A tool with a magnet is useful.



Step 3: Take a new battery out of your battery pack.



Step 4: Remove the paper tab from the battery. After removing the tab, let the battery absorb the air for 30 seconds to ensure maximum battery life

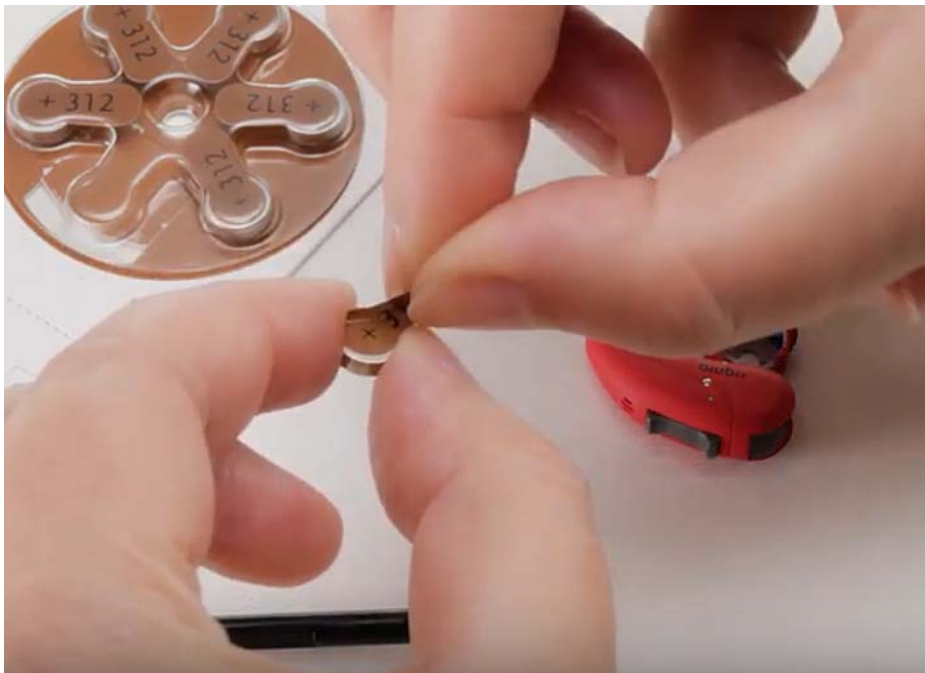

Step 5: Place the new battery in the battery door with the positive (+) side of the battery facing up.



Step 6: Close the battery door and you are finished.

